



Sound Heavy Machinery

1809 Blue Clay Road
Wilmington, NC 28412

Tel: 910 782 2477

Email: info@SoundHM.com

URL: www.SoundHM.com

Services: Sales, Service, Parts



AT24 US

PICK AND CARRY CRANE



MAXIMUM CAPACITY
24 ton



MAXIMUM BOOM LENGTH
58'8"



MAXIMUM HOOK HEIGHT
55'9"

terex.com/franna



OVERVIEW

The AT24 US is a mid-sized, mobile pick and carry crane with a maximum lifting capacity of 24 ton. Boasting maximum safety features and superior capabilities than that of other pick and carry cranes in the field, the AT24 US is a logical choice for customers who cover a wide range of applications.

⚙️ KEY FEATURES AND BENEFITS:

- ▶ 24 ton @ 4'7" radius
- ▶ 1.8 ton @ 51'10" radius
- ▶ 55'9" maximum hook height
- ▶ 17.6 ton capacity on 4 part hook block
- ▶ Single line pull 4.4 ton
- ▶ Dynamic LMI (Patent Protected)
- ▶ Wide stance boom lift cylinders enhance operator's vision.
- ▶ Easy access to all key maintenance points
- ▶ Modern cabin design ensures maximum comfort for the operator



TECHNICAL DESCRIPTION

01. Boom

Maximum boom length	58'8"
Maximum hook height	55'9"
Boom elevation angle range	-6° / 60°
Maximum hook height with jib	65'7"
Articulation	40° R / 40° L
Machinery hook (rhino)	11 ton

02. Winch

Maximum line pull	4.4 ton
Two speed winch	125 ft/min / 250 ft/min
Hook block (4 part)	17.6 ton maximum rated capacity

03. Engine & Transmission

Standard engine	Mercedes OM 934 Tier 4 F
Engine power	228 hp
Engine torque	664 lb-ft
Fuel Type	Diesel
Fuel Capacity	116 gallons
Transmission	Allison 6 speed
Transfer case	ZF 2:1 Ratio

04. Hydraulic System

Axial piston pump	3.8 cu.in/rev
Maximum pump flow rate	34 gal/min
Maximum working pressure	3625 psi
Hydraulic tank capacity	52 gallons

05. Chassis

Front Axle	17,636 lbs
Rear Axle	26,455 lbs
Axle total	44,091 lbs
Turning circle	24'2"

06. Brakes & Suspension

Brake System	Air operated drum brakes
Suspension	Two semi elliptic springs on front and rear axle plus torsion bar on front axle for stability


07. Vehicle Performance

Maximum rated travel speed	50 mph
Gradeability (smooth concrete)	50%





RADIUS LOAD CHART

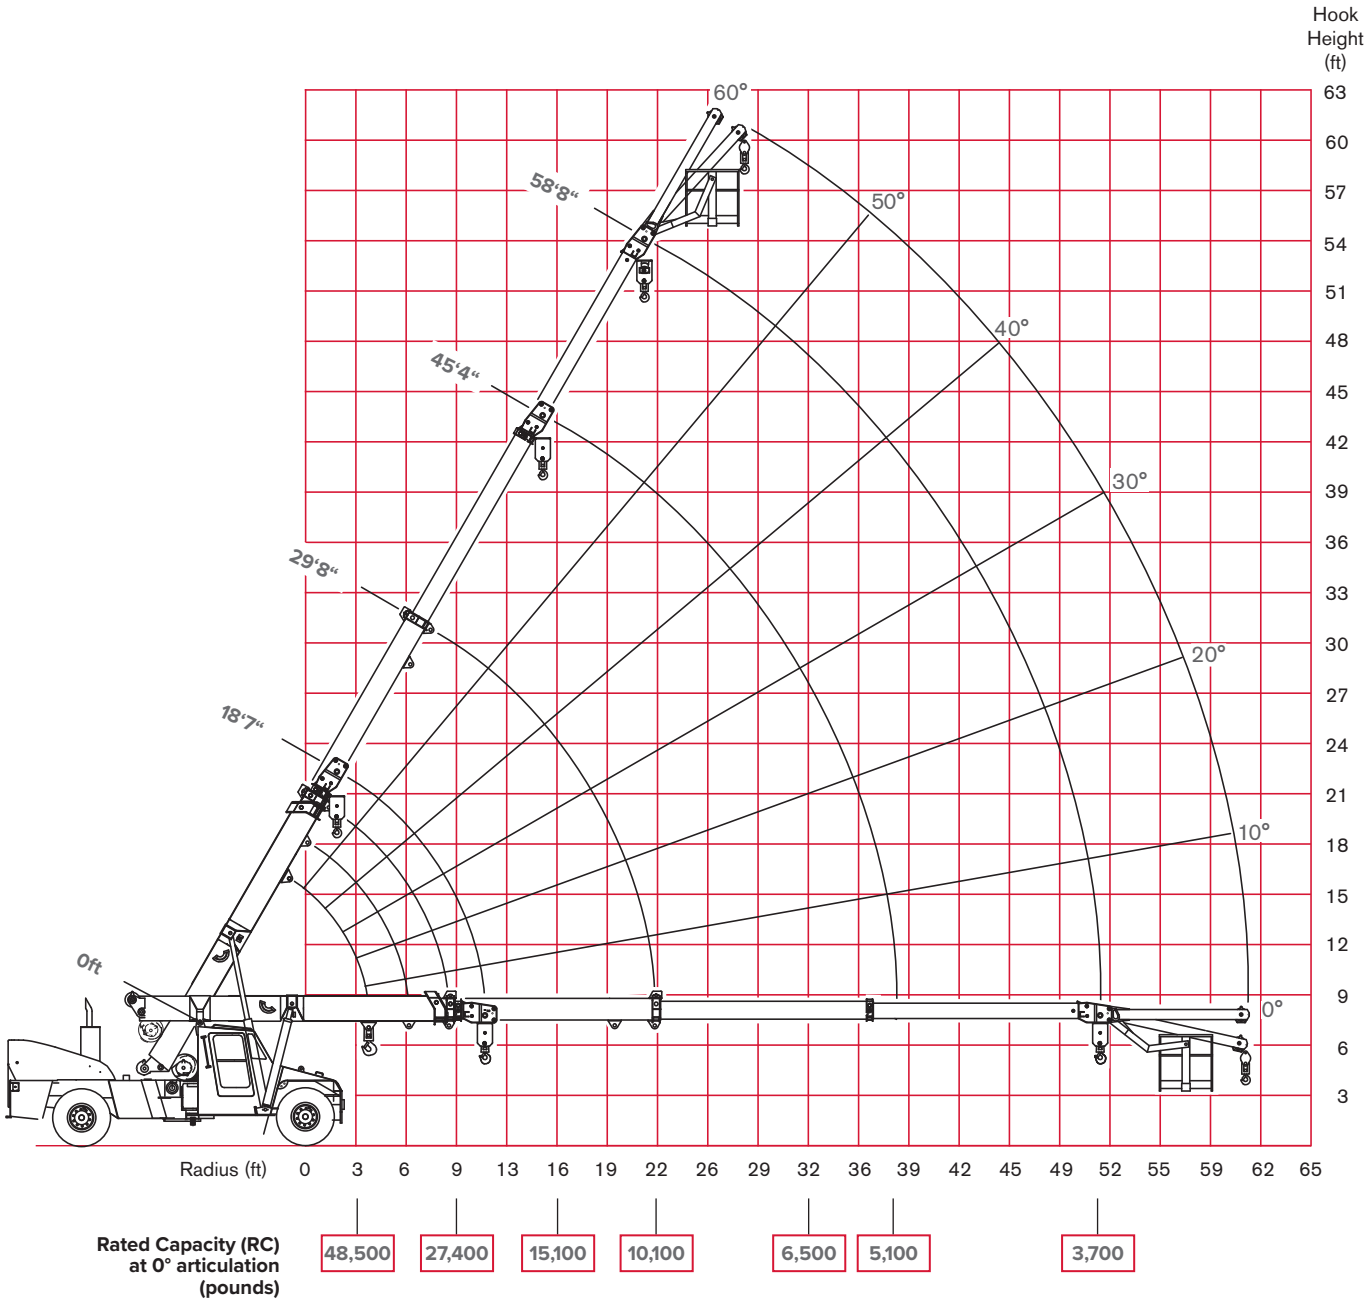

NOTE: Rated Capacity values shown are for the Pick and Carry Chart.

LOAD CHART

RATED CAPACITY CHART - FALL BLOCK

RADIUS	BOOM LENGTH (ft)																		PITCH 0°		ROLL 0°	
	18'7"	19'8"	21'4"	23'0"	24'7"	26'2"	27'10"	29'6"	31'2"	32'9"	34'5"	36'1"	37'8"	39'4"	41'	42'7"	44'3"	45'5"				
5'3"	35200	35200	33800	32600																		
	35200	35200	33800	32600																		
	48	51	54	57																		
6'6"	35200	35200	35200	34300	33000	32100																
	35200	35200	35200	34300	33000	32100																
	42	46	50	53	56	58																
8'2"	32100	32000	32000	32000	31900	31400	30200	29100														
	28400	28400	28400	28300	28300	28300	28300	28200														
	34	39	44	48	51	54	56	58														
9'10"	26400	26400	26400	26400	26300	26300	26300	26300	26200	24500												
	23300	23300	23300	23300	23300	23200	23200	23200	23200	23200												
	25	31	37	42	46	49	52	55	57	59												
11'5"	22300	22300	22300	22300	22300	22300	22200	22200	22200	22200	20800	17900										
	19700	19800	19700	19700	19700	19700	19700	19600	19600	19600	19600	17900										
	8	20	29	36	41	45	48	51	53	55	57	59										
13'1"	21900	19800	19400	19200	19200	19200	19200	19200	19100	19100	16700	15500	14900									
	19200	17500	17000	17000	16900	16900	16900	16900	16900	16900	16700	15500	14900									
	(11'8")	(12'9")	19	28	35	39	43	47	49	52	54	56	57	59								
14'9"			17400	16900	16900	16900	16900	16800	16800	16800	16800	15600	14500	13900	13400	13000						
			15300	14800	14800	14800	14800	14800	14800	14800	14800	14800	14500	13900	13400	13000						
			(14'5")	18	27	34	38	42	45	48	50	52	54	56	58	59						
16'4"				15400	15100	15100	15100	14900	14900	14900	14900	14600	13600	13100	12500	12100	11700	11400				
				13500	13200	13200	13200	13200	13200	13200	13100	13100	13100	13100	12500	12100	11700	11400				
				(16'1")	18	27	33	37	41	44	47	49	51	53	55	56	58	59				
19'8"					13700	12400	12200	12200	12200	12200	12200	12100	12100	11600	11100	10800	10300	10100				
					12100	10900	10600	10600	10600	10600	10600	10600	10500	10500	10500	10500	10300	10100				
					(17'8")	(19'4")	17	25	31	35	39	42	45	47	49	51	53	54				
23'0"							11300	10300	10100	10100	10100	10100	10100	10100	10000	9700	9300	8800				
							9900	9000	8800	8800	8800	8800	8800	8800	8800	8800	8800	8800				
							(21'0")	(22'7")	16	24	29	34	37	40	43	45	47	48				
26'3"									9400	8800	8500	8500	8500	8500	8500	8400	8100	7900				
									8200	7600	7400	7400	7400	7400	7400	7400	7400	7400				
									(24'3")	(25'11")	15	23	28	32	36	38	41	43				
29'6"											8100	7400	7400	7400	7400	7400	7400	7200				
											7000	6500	6300	6300	6300	6300	6300	6300				
											(27'6")	(29'2")	15	22	27	31	34	36				
32'9"													7000	6600	6500	6500	6500	6500				
													6000	5500	5500	5500	5500	5500				
													(30'10")	(32'6")	14	21	26	29				
36'1"															6100	5700	5700	5700				
															5000	4700	4600	4600				
															(34'1")	(35'9")	13	18				
38'6"																		5400	5100			
																		4200	4000			
																		(37'5")	(38'6")			

KEY:

- RC (lb) AT 0 DEG ARTICULATION
- RC (lb) AT FULL ARTICULATION
- BOOM ANGLE OR (RADIUS AT 0 DEG BOOM ANGLE)

“Weight of slings & hook block to be added to load
Read and understand warning notes before operating crane”



Sound Heavy Machinery

1809 Blue Clay Road
Wilmington, NC 28412


Tel: 910 782 2477

Email: info@SoundHM.com

URL: www.SoundHM.com

Services: Sales, Service, Parts

OUR LOCATIONS

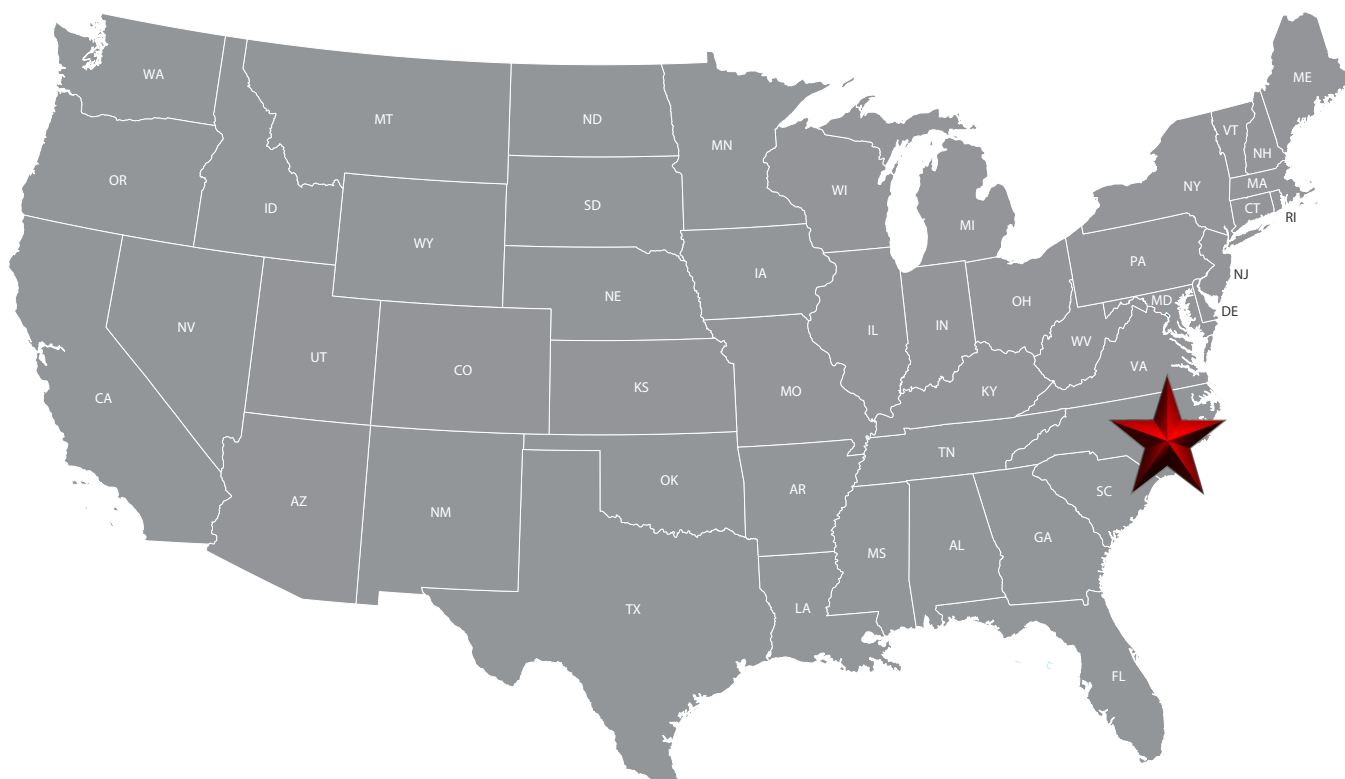

Wilmington (Americas Head Office)

Terex Cranes Americas
3147 South 17th Street Suite 100
Wilmington, NC 28412

Tel: +1 910 395 8501

Email: franna@terex.com

Services: Manufacturing, Sales, Service, Parts

Sound Heavy Machinery

1809 Blue Clay Road
Wilmington, NC 28412

Tel: 910 782 2477

Email: info@SoundHM.com

URL: www.SoundHM.com

Services: Sales, Service, Parts

The material in this document is for information only and is subject to change without notice.
Franna* assumes no liability resulting from errors or omissions in this document, or from the use of the information contained herein.
Due to continual product development we reserve the right to change specifications without notice. Product performance figures given in this brochure are for guidance purposes only, this information does not constitute an expressed or implied warranty or guarantee, but shows test examples. These results will vary depending on application. Photographs are for illustrative purposes only; some or all of the machines in the illustrations may be fitted with optional extras. Please check with your Dealer for details on optional extras.



www.SoundHM.com