

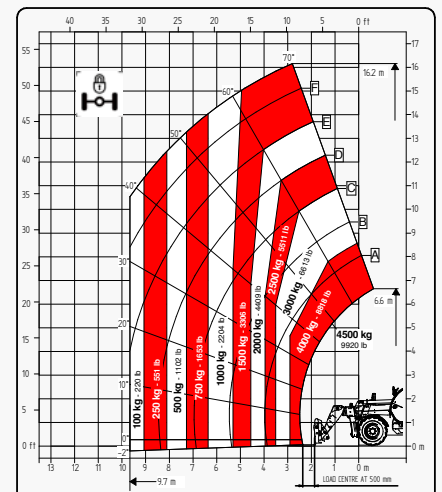


TECHNICAL SHEET

FT-1054 BIG RANGE

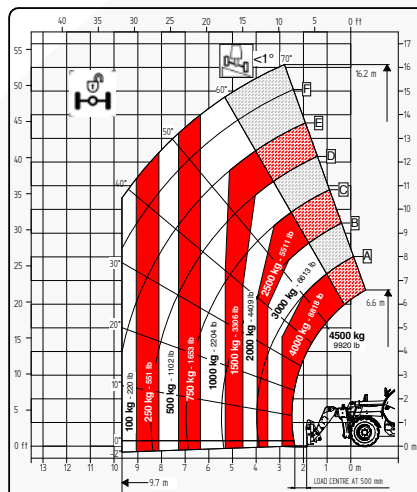

Faresin USA would like to bring to the attention of all potential customers, recipients, and, to the fullest extent possible, external stakeholders, that Faresin Industries S.p.A. has adopted a general disclaimer. This disclaimer pertains to the description of the technical and functional characteristics of its machinery, as well as the methods of their use, including safety considerations. This disclaimer is of a general nature, and Faresin Industries S.p.A. encourages you to review it, which can be accessed through the website: www.faresinindustries.com.

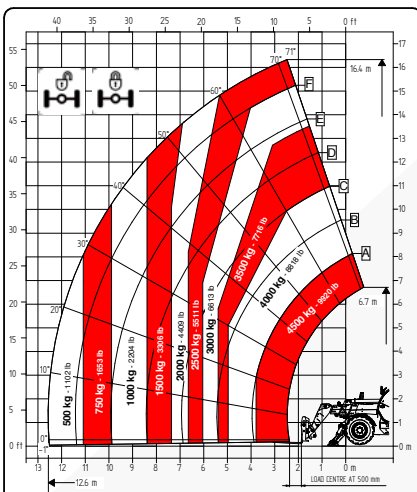

FARESINUSA.COM

877-327-3746

FT-1054 BIG RANGE

TECHNICAL FEATURES

MODELS		FT-1054	
DIMENSIONS			
[A] Height	ft	8.3	
[B] Width	ft	7.7	
[C] Gauge	ft	6	
[D] Ground clearance	ft	1.1	
[E] Front overhang	ft	7.6	
[F] Pitch	ft	9.6	
[G] Rear overhang	ft	4	
[H] Width with stabilizers	ft	11.2	
[I] Length	ft	21.3	
[L] Cabin width	ft	3.1	
WEIGHT			
Classic 55	lbs	26,631	
Classic 74	lbs	26,786	

MODELS		FT-1054	
DETAILS			
Number of extracting sections	nr	3	
Max capacity	lbs	9,920	
Max lifting height	ft	53.8	
Max horizontal boom extension	ft	41.3	
Boom extension at max height	ft	8.2	
Swinging Angle	°	144	
TANK CAPACITY			
Hydraulic oil tank	gal	39.6	
Diesel tank	gal	31.7	
CONNECTION FOR EQUIPMENT			
FH		●	
EURO		○	

Dimensions defined on model with wheels 405/70 20

CONFIGURATION		CLASSIC 55		CLASSIC 74	
TRANSMISSION					
Hydrostatic		single gear		single gear	
Speed	mph	15,5		18,6	
ENGINE TIER 4 FINAL					
Builder		Deutz Tier 4 Final		Deutz Tier 4 Final	
Power	kW/hp	55,4/75,3		74,4/101	
Aftertreatment system		DOC + DPF		DOC + DPF + SCR	
Drawbar pull	daN	5000		5000	
HYDRAULIC					
Pump type		gears pump		gears pump	
Hydraulic capacity	gal/psi	31.7/3,335		31.7/3,335	
TYRES					
405/70 20		●		●	
405/70 24		○		○	
445/65 R22.5*		○		○	
Turning radius	ft	13.8		13.8	
OTHER					
Joystick		mechanical-electro proportional		mechanical-electro proportional	
Quick coupling		○		○	
Electro-proportional double acting rear hydraulic connection		○		○	
Front and rear LED lights		○		○	
Rear trailer lights socket		○		○	
6 t fixed tow hook		○		○	
Engine water pre-heating		○		○	
Air conditioning		○		○	
Floating boom		○		○	
Boom suspension		○		○	
Manual 6-way diverter		○		○	
PEB (Boom Electric Socket)		○		○	
Creeper		○		○	
Front constant flow		○		○	
Bucket mode		●		●	
Pneumatic / hydraulic trailer brake		○		○	
Frame lateral levelling ±10°		●		●	
Front Stabilizers		●		●	
Rear axle swing block		○		○	